


NeoCD3.5H True Ribbon Tweeter


FEATURES
- strong Neodymium magnet
- 3 inch enforced sandwich diaphragm
- build-in impedance convertor
- low distortion, very fast transition

Parameter	
Sensitivity	**95.5dB/1m/2.83v**
Power handling	**12W nominal, 25W max**
Frequency range	**1,100-30,000Hz**
Nominal impedance	**7 ohm**
DCR	**0.02 ohm**
Ribbon dimension	**9mmX60mmX0.015mm**
Effective ribbon area	**360 square millimeter**
Ribbon weight	**30 milligram**
Gap flux	**0.5 Telsa average**
Gap height	**4 millimeter**
Recommend crossover frequency	**2,500Hz with 3-order**
Net. Weight	**520 gram**

www.fountek.net
email: info@fountek.net
tel: +86-573-8301 9220 fax: +86-573-8301 9221

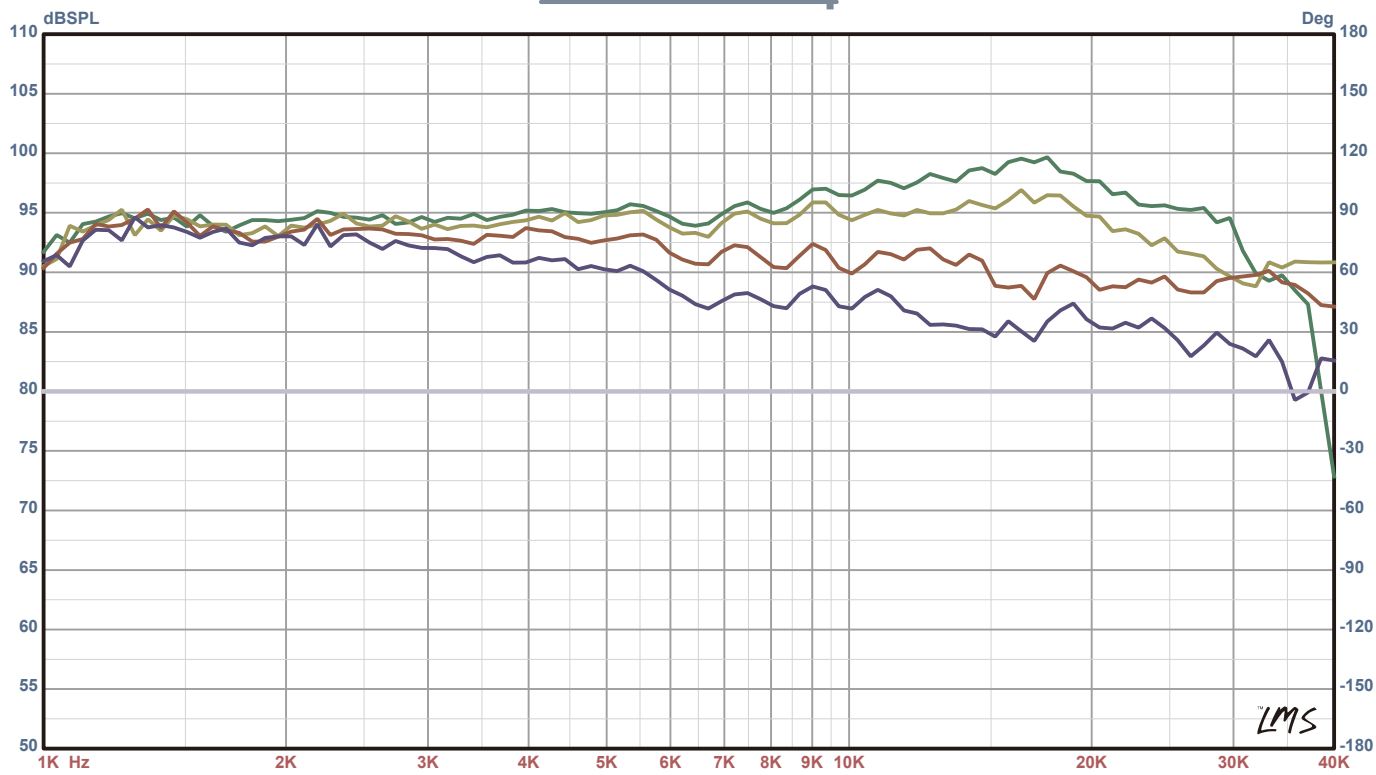


horizontal diffusion: on-axis, 15 degree , 30 degree, 45 degree

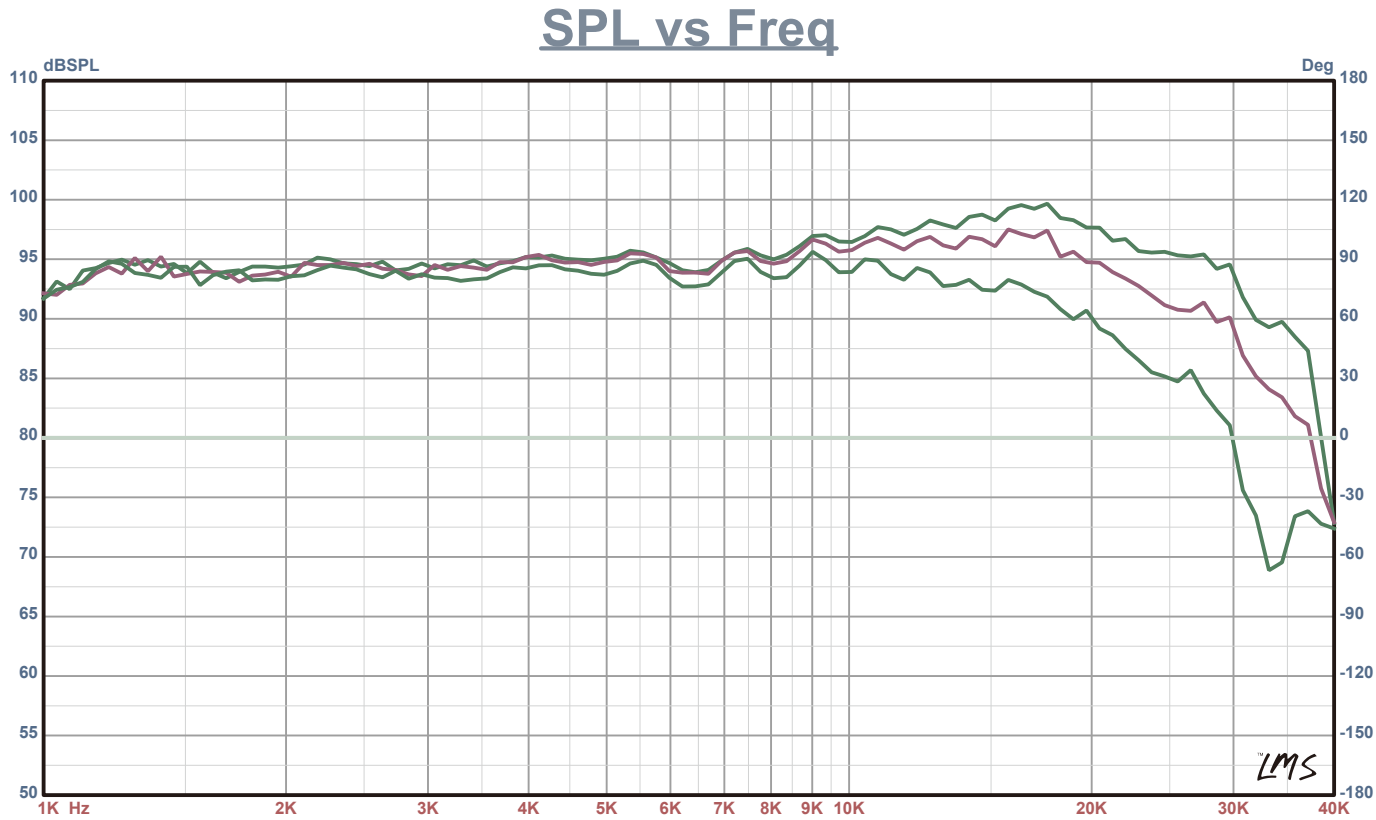

vertical diffusion: on-axis, 5 degree , 10 degree

www.fountek.net
email: info@fountek.net
tel: +86-573-8301 9220 fax: +86-573-8301 9221

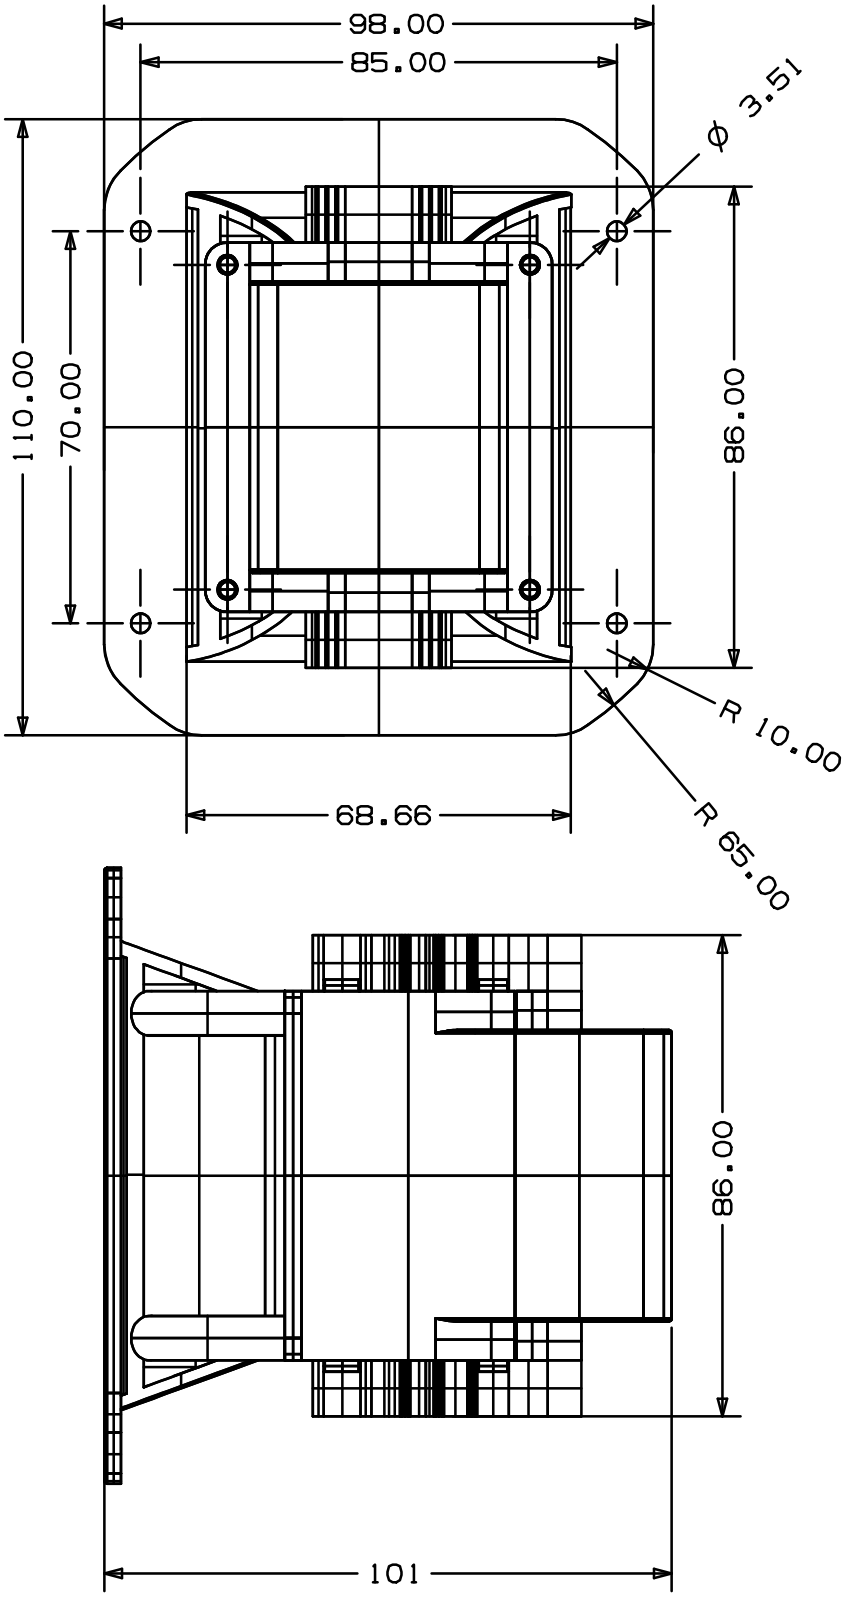

www.fountek.net
email: info@fountek.net
tel: +86-573-8301 9220 fax: +86-573-8301 9221